

Solar inverters

ABB string inverters

TRIO-50.0-TL-OUTD / TRIO-60.0-TL-OUTD-480

50 to 60 kW



The new TRIO-50.0/60.0 inverter is ABB's three-phase string solution for cost efficient large decentralized photovoltaic systems for both commercial and utility applications.

The most powerful ABB string inverter available today, this new addition to the TRIO family has been designed with the objective to maximize the ROI in large systems with all the advantages of a decentralized configuration for both rooftop and ground-mounted installations.

Modular design

TRIO-50.0/60.0 has a landscape modular design to guarantee maximum flexibility.

The separate and configurable AC and DC compartments increase the ease of installation and maintenance with their ability to remain separately wired from the inverter module inside the system.

The TRIO comes with the most complete wiring box configurations available including up to 16 DC inputs with fast connectors, monitored fuses, AC and DC switches and monitored type II AC and DC surge arresters.

Flexibility of installation

The forced air cooling system, designed for a simple and fast maintenance allows for the maximum flexibility of installation. The inverter comes with mounting supports for both horizontal and vertical positions which allow for the best use of space available beneath the solar panels.

Design flexibility

The double stage conversion topology offers the advantage of a wide input voltage range for maximum flexibility of the system design.

ABB

Highlights


- Transformerless topology
- Each inverter is set on specific grid codes which can be selected directly in the field
- Separate AC and DC compartments are available in different configurations
- Wide input range
- Both vertical and horizontal installation
- New version 60 kW available (480 Vac)



Technical data and types

| Type code | TRIO-50.0-TL-OUTD | TRIO-60.0-TL-OUTD-480 |
|--|---|---|
| Input side | | |
| Absolute maximum DC input voltage ($V_{max,abs}$) | 1000 V | |
| Start-up DC input voltage (V_{start}) | 420...700 V (Default 420 V) | 420...700 V (Default 500 V) |
| Operating DC input voltage range ($V_{dc,min}...V_{dc,max}$) | 0,7x V_{start} ...950 V (min 300 V) | 0,7x V_{start} ...950 V (min 360 V) |
| Rated DC input voltage (V_{dc}) | 610 Vdc | 720 Vdc |
| Rated DC input power (P_{dc}) | 52000 W | 61800 W |
| Number of independent MPPT | 1 | |
| MPPT input DC voltage range ($V_{MPPT,min} ... V_{MPPT,max}$) at P_{aer} | 480-800 Vdc | 570-800 Vdc |
| Maximum DC input current ($I_{dc,max}$) | 108 A | |
| Maximum input short circuit current | 160 A | |
| Number of DC inputs pairs | 12 or 16 (-SX version) / 12 (-SY version) | |
| DC connection type | PV quick fit connector ³⁾ on -SX and -SY version / Screw terminal block on Standard and -S version | |
| Input protection | | |
| Reverse polarity protection | Yes, from limited current source | |
| Input over voltage protection for each MPPT - varistor | Yes, 2 | |
| Input over voltage protection for each MPPT - plug in modular surge arrester | Type 2 (-SX version) / Type 1+2 (-SY version) | |
| Photovoltaic array isolation control | According to local standard | |
| DC switch rating for each MPPT (version with DC switch) | 200 A / 1000 V | |
| Fuse rating (version with fuses) | 15 A / 1000 V | |
| Output side | | |
| AC grid connection type | Three-phase (3W+PE or 4W+PE) | |
| Rated AC power (P_{ac} @ $\cos\phi=1$) | 50000 W | 60000 W |
| Maximum AC output power ($P_{ac,max}$ @ $\cos\phi=1$) | 50000 W | 60000 W |
| Maximum apparent power (S_{max}) | 50000 VA | 60000 VA |
| Rated AC grid voltage ($V_{ac,r}$) | 400 V | 480 V |
| AC voltage range | 320...480 V ¹⁾ | |
| Maximum AC output current ($I_{ac,max}$) | 77 A | |
| Contributory fault current | 92 A | |
| Rated output frequency (f_r) | 50 Hz / 60 Hz | |
| Output frequency range ($f_{min}...f_{max}$) | 47...53 Hz / 57...63 Hz ²⁾ | |
| Nominal power factor and adjustable range | > 0.995; 0...1 inductive/capacitive with maximum S_{max} | |
| Total current harmonic distortion | <3% | |
| Maximum AC cable section allowed | 95 mm ² copper (with TRIO-ALUMINUM-KIT 150 mm ² aluminum) | |
| AC connection type | Screw terminal block, cable gland PG42 | |
| Output protection | | |
| Anti-islanding protection | According to local standard | |
| Maximum external AC overcurrent protection | 100 A | |
| Output overvoltage protection - varistor | Yes, 4 | |
| Output overvoltage protection - plug in modular surge arrester (-SX version) | 4, Type 2 | |
| Operating performance | | |
| Maximum efficiency (η_{max}) | 98.3% | 98.5% |
| Weighted efficiency (EURO/CEC) | 98.0% / - | 98.0% / - |
| Communication | | |
| Remote monitoring | VSN300 Wifi Logger Card (opt.), VSN700 Data Logger (opt.) | |
| Wireless local monitoring | VSN300 Wifi Logger Card (opt.) | |
| User interface | LEDs | |
| Communication interface | 2 (RS485) | |
| Environmental | | |
| Ambient temperature range | -25...+60°C/ -13...14°F with derating above 50°C /140°F | -25...+60°C/-13...140°F with derating above 45°C/113°F |
| Relative humidity | 4%... 100% condensing | |
| Sound pressure level, typical | 75 dB(A) @1 m | |
| Maximum operating altitude without derating | 2000 m / 6560 ft | |

Block diagram of TRIO-50.0-TL-OUTD/TRIO-60.0-TL-OUTD-480

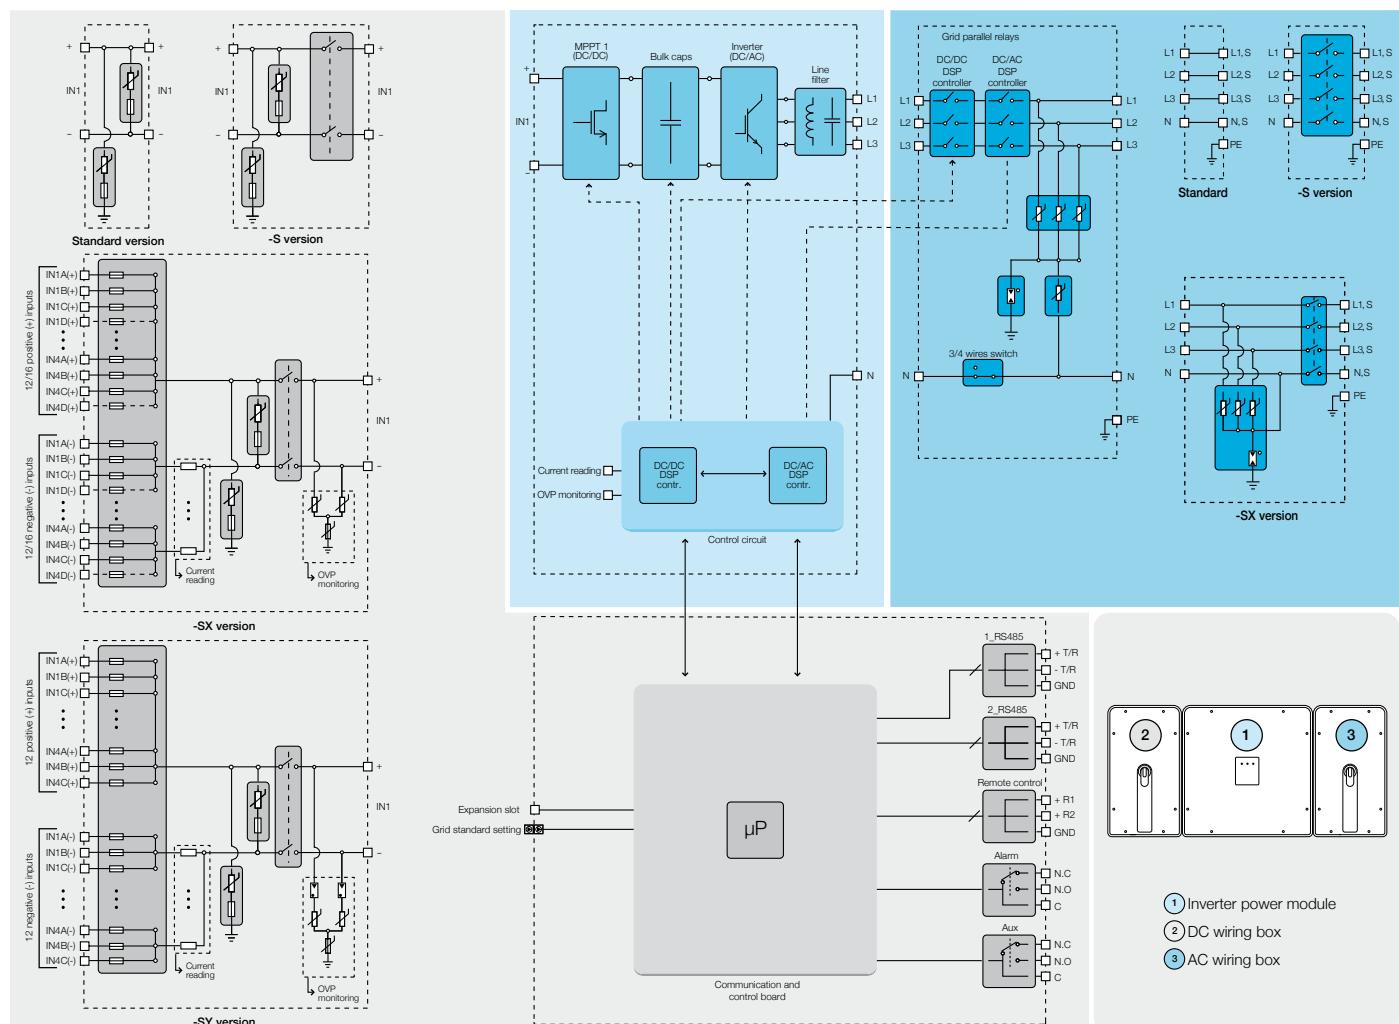

Technical data and types

| Type code | TRIO-50.0-TL-OUTD | TRIO-60.0-TL-OUTD-480 |
|--|--|-------------------------------------|
| Physical | | |
| Environmental protection rating | IP65 (IP54 for cooling section) | |
| Cooling | Forced air | |
| Dimension (H x W x D) | 725 mm x 1491 mm x 315 mm / 28.5" x 58.7" x 12.4" | |
| Weight | 95 kg / 209 lbs overall, 66 kg / 145 lbs electronic compartment, 15 kg / 33 lbs AC wiring box (full optional), 14kg / 31 lbs DC wiring box (full optional) | |
| Mounting system | Wall bracket, horizontal support | |
| Safety | | |
| Isolation level | Transformerless | |
| Marking | CE | |
| Safety and EMC standard | IEC/EN 62109-1, IEC/EN 62109-2, EN 61000-6-2, EN 61000-6-3, EN 61000-3-11, EN 61000-3-12, CEI 0-21, CEI 0-16, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G59/3, EN 50438 (not for all national appendices), RD 1699, RD 413, RD 661, P.O. 12.3, AS 4777, BDEW, NRS-097-2-1, MEA, PEA, IEC 61727, IEC 60068, IEC 61683, VFR-2014, IEC 62116 | |
| Grid standard (check your sales channel for availability) | | |
| Available product variants | | |
| Inverter power module | TRIO-50.0-TL-OUTD-POWER MODULE | TRIO-60.0-TL-OUTD-POWER MODULE |
| DC wiring box options | | |
| Input connections with terminal blocks | DCWB-TRIO-50.0-TL-OUTD | DCWB-TRIO-60.0-TL-OUTD |
| Input connections with terminal blocks + DC switch | DCWB-S-TRIO-50.0-TL-OUTD | DCWB-S-TRIO-60.0-TL-OUTD |
| 12 quick Input connections + fuses + DC switch + surge arresters Type 2 | DCWB-SX-TRIO-50.0-TL-OUTD/12 INPUTS | - |
| 16 quick Input connections + fuses + DC switch + surge arresters Type 2 | DCWB-SX-TRIO-50.0-TL-OUTD/16 INPUTS | DCWB-SX-TRIO-60.0-TL-OUTD/16 INPUTS |
| 12 quick Input connections + fuses + DC switch + surge arresters Type 1+2 | DCWB-SY-TRIO-50.0-TL-OUTD | - |
| AC wiring box options | | |
| AC output connections with terminal blocks | ACWB-TRIO-50.0-TL-OUTD | ACWB-TRIO-60.0-TL-OUTD |
| AC output connections with terminal blocks + AC switch | ACWB-S-TRIO-50.0-TL-OUTD | ACWB-S-TRIO-60.0-TL-OUTD |
| AC output connections with terminal blocks + AC switch + surge arrester Type 2 | ACWB-SX-TRIO-50.0-TL-OUTD | ACWB-SX-TRIO-60.0-TL-OUTD |
| Optional available | | |
| TRIO-GROUNDING-KIT | Available | Available |
| TRIO-ALUMINUM-WIRING-KIT | Available | Available |


¹⁾ The AC voltage range may vary depending on specific country grid standard

²⁾ The Frequency range may vary depending on specific country grid standard


³⁾ Please refer to the document "String inverters – Product manual appendix" available at www.abb.com/solarinverters for information on the quick-fit connector brand and model used in the inverter

Remark. Features not specifically listed in the present data sheet are not included in the product

Efficiency curves of TRIO-50.0-TL-OUTD

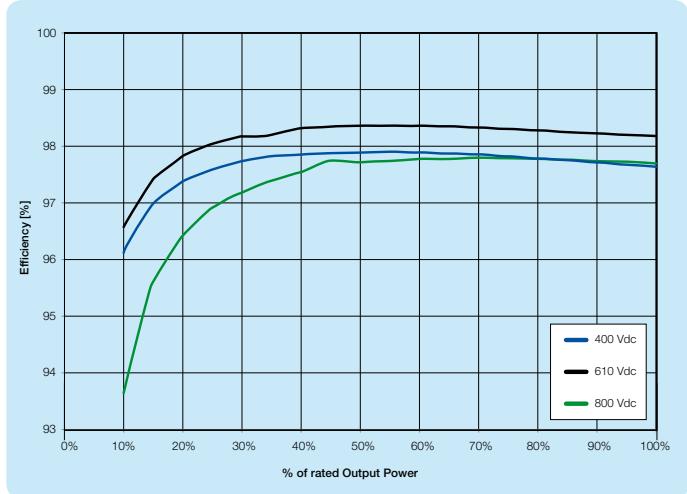

Efficiency curves of TRIO-60.0-TL-OUTD

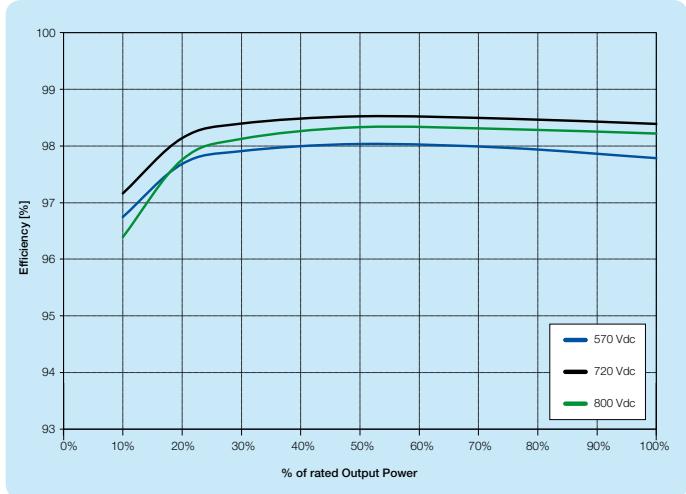

Support and service

ABB supports its customers with dedicated, global service organization in more than 60 countries and strong regional and national technical partner networks providing complete range of life cycle services.

For more information please contact your local ABB representative or visit:

www.abb.com/solarinverters
www.abb.com/solar
www.abb.com

© Copyright 2017 ABB. All rights reserved.
Specifications subject to change without notice.



Headquarters T. +39 0461 1600050
via alle Segherie, 8 info@esaving.eu
38015 Lavis (TN) Italia www.esaving.eu

